RPC-.E/WU/BP-... time relays



RPC-1E-UNI







- Single-function time relays (3 versions of relays with 1 time function 0; 8 time ranges) • Cadmium - free contacts 1 CO and 2 CO • AC and AC/DC input voltages
- Cover modular, width 17,5 mm
- Direct mounting on 35 mm rail mount acc. to EN 60715
- Applications: in low-voltage systems
- Compliance with standard EN 61812-1

	• Recognitions, certifications, directives: RoHS, (€ [∭
	1 CO 2 CO
	AgSnO ₂
AC	300 V
AC1	16 A / 250 V AC 8 A / 250 V AC
DC1	16 A / 24 V DC 8 A / 24 V DC
DC1	0,3 A / 250 V DC 0,3 A / 250 V DC
	16 A / 250 V AC 8 A / 250 V AC
AC1	4 000 VA 2 000 VA
	1 W 10 mA
	≤ 100 mΩ
AC1	600 cycles/hour
50/60 Hz AC	230 V terminals A1, A2
	12240 V terminals (+)A1, (-)A2
,	≥ 0,1 U _n
	0,91,1 Un
AC	≤ 3,5 VA 230 V AC, 50 Hz ≤ 1,5 VA 12240 V AC/DC, AC: 50 Hz
DC	≤ 1,5 W 12240 V AC/DC
AC	4863 Hz
	250 V AC
	4 000 V 1,2 / 50 μs
	1,27 00 µ3
	2
	cover: V-0 front panel: V-2 UL 94
but	4 000 V AC type of insulation: basic
•	1 000 V AC type of clearance: micro-disconnection
	2 000 V AC contacts 2 CO, type of insulation: basic
	7.71
	> 0,5 x 10 ⁵ 8 A/16 A, 250 V AC
	> 3 x 10 ⁷
	90 ② x 17,5 x 64,5 mm / contact 1 CO: 6471 g, contacts 2 CO: 7071
storage	-40+70 °C
_	-20+50 °C
	IP 20 EN 60529
	up to 85%
	15 g / 0,35 mm DA 1055 Hz
	E, Wu, Bp
	OFF - permanent switching off; ON - permanent switching on
	1 s ❸ ; 10 s; 1 min.; 10 min.; 1 h; 10 h; 1 d; 10 d
	smooth - (0,11) x time range (does not refer to range ON / OFF)
	± 5% 9 9 / ± 0,5% 9
	temperature: ± 0,05% / °C supply voltage: ± 0,01% / V
AC	≤ 150 ms 230 V AC, 50 Hz ≤ 400 ms 12240 V AC/DC, AC: 50 H
DC	≤ 150 ms 12240 V AC/DC
DC	green LED U ON - indication of supply voltage U
	AC1 DC1 AC1 AC1 AC1 50/60 Hz AC DC AC DC AC tput earance e

[•] Codes of versions - see "Ordering codes", page 299 and descriptions of time functions, page 298. • Length with 35 mm rail catches: 98,8 mm. The first range setpoint (1 s) setting accuracy and repeatability are smaller than the given ones in technical parameters (significant influence of the operational relay operating time, processor start-time, and the moment of supply switching as referred to the AC supply course). from the final range values, for the setting direction from minimum to maximum.



RPC-.E/WU/BP-... time relays

Time functions


E - ON delay.

Codes of versions: RPC-.E-...



On applying the supply voltage U the set interval T begins - off-delay of the output relay R. After the interval T has lapsed, the output relay R switches on and remains on until supply voltage U is interrupted.

Wu - ON for the set interval. Codes of versions: **RPC-.WU-...**



Applying the supply voltage U immediately switches the output relay R on for the set interval T. After the interval T has lapsed, the output relay R switches off.

Bp - Symmetrical cyclical operation pause first. Codes of versions: **RPC-.BP-...**



Applying the supply voltage U starts the cyclical operation from the interval T - switching the output relay R off followed by switching on the output relay R for the interval T. The cyclical operation lasts until the supply voltage U is interrupted.

ON / **OFF** - Permanent switching on / off.

The functions ON and OFF are selected with T time range adjusting knob. In the ON function, the normally open contacts are closed all the time whereas in the OFF function they are open. The preset measurement time is of no significance in these functions. The ON or OFF functions are used for the time relay operation control in electric systems.

 \boldsymbol{U} - supply voltage; \boldsymbol{R} - output state of the relay; \boldsymbol{S} - control contact state;

T - measured time; t - time axis

Additional functions

Supply diode: it is lit permanently when the time is not being measured. In course of the T time measurement, it flashes at 500 ms period where it is lit for 50% of the time, and off for 50% of the time.


Adjustment of the set values: the values of time and range are read in the course of the relay's operation. The set values may be modified at any moment.

Release: the relay is released with the supply voltage.

Supply:


- RPC-...-A230: the relay may be supplied with AC voltage 48...63 Hz of 207...253 V,
- $\mbox{RPC-...-UNI}:$ the relay may be supplied with DC voltage or AC voltage 48...63 Hz of 10,8...264 V.

Dimensions

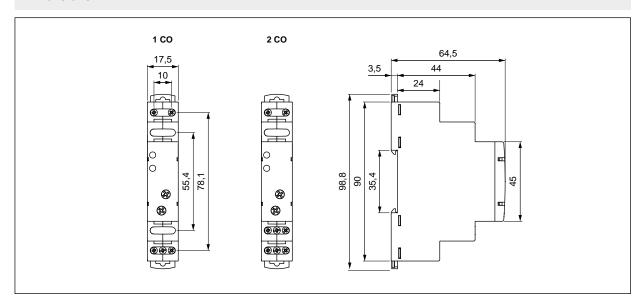

RPC-.E/WU/BP-... time relays

Front panel description

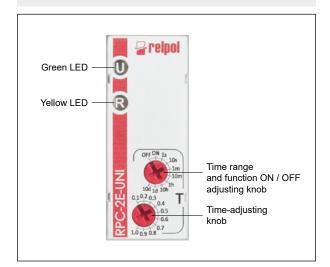

Connection diagrams

Note: the indicated polarity of the supply refers only to the relays RPC-...-UNI.

Mounting

Relays **RPC-...-...** are designed for direct mounting on 35 mm rail mount acc. to EN 60715. Operational position - any. **Connections:** max. cross section of the cables: 1 x 2,5 mm² (1 x 14 AWG), stripping length: 6,5 mm, max. tightening moment for the terminal: 0,5 Nm.




Two catches: easy mounting on 35 mm rail, firm hold (top and bottom).



Mounting wires in clamps: universal screw (cross-recessed or slotted head).

Ordering codes

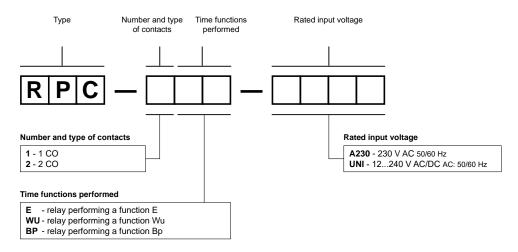

Examples of ordering codes:

RPC-1E-A230 time relay **RPC-.E-...**, single-function (relay perform function E), cover - modular, width 17,5 mm, one changeover contact, contact material AgSnO₂, rated input voltage

230 V AC 50/60 Hz

RPC-2BP-UNI time relay **RPC-.BP-...**, single-function (relay perform function Bp), cover - modular, width 17,5 mm, two changeover contacts, contact material AgSnO₂, rated input voltage

12...240 V AC/DC AC: 50/60 Hz

